

Data sheet - series FN



PRODUCT SPECIFICATION

SK H2O protec special joint profile type FN according to DIN 7865, part 2, is a permanently flexible profile made of elastomer, EPDM, providing protection against dirt and maintaining the function of expansion joints in waterproof concrete structures with large movements and high water pressures.

Characteristics / Advantages

- high tensile strength and elongation at break
- high permanent flexibility and high-load bearing capacity
- suitable for water pressure and large settlements
- resistant to all natural media acting aggressively to concrete
- resistant to a wide range of chemical substances (tests required for each additional specific situation)
- resistant to bitumen
- supply of systems for easy handling on site
- vulcanizable by using butt joints on site

Application

- joint sealing in concrete structures
- expansion joint sealing system for in-situ concrete

Typical structures

- underground car parks, bridges, trough and bridge constructions
- rail tunnels and road tunnels
- water construction plants

Data sheet - series FN



Standards / Directives

- DIN 18197
- DIN 7865, part 2
- WU- Directives DAfStb
- ZTV-ING, Riz-Ing
- Vulcanizing instructions

Test certificate / Approvals

- latest manufacturer's test certificate
- certificate of conformity - DIN 7865
- external monitoring by MPA NRW
- internal monitoring

PRODUCT DATA

Material

- EPDM elastomer (ethylene-propylene-diene monomer)

Colour

- black with grey visible surface

Packaging

- supplied as standard rolls (25 m)

Data sheet - series FN



MECHANICAL PROPERTIES

according to DIN 7865, part 2

Shore A hardness	62 ± 5
-------------------------	------------

Tear strength	≥ 10 MPa
----------------------	---------------

Elongation at break	≥ 380 %
----------------------------	--------------

Compression set	168h / 23°C $\leq 20\%$ 24h / 70°C $\leq 35\%$
------------------------	---------------------------------------------------

Tear propagation resistance	≥ 8 kN/m
------------------------------------	---------------

Performance after heat ageing	Shore A hardness change ≤ 8 Tear strength ≥ 9 MPa Elongation at break $\geq 300\%$
--------------------------------------	----------------------------------------------------------------------------------------------------


Low temperature performance	≤ 90 Shore A
------------------------------------	-------------------

Tension set	$\leq 20\%$
--------------------	-------------

Performance after conditioning in hot bitumen	Residual deformation $< 20\%$ Tear strength ≥ 7 MPa Elongation at break $\geq 300\%$
------------------------------------------------------	-------------------------------------------------------------------------------------------------

Performance after ozone ageing	No cracks
---------------------------------------	-----------

Data sheet - series FN

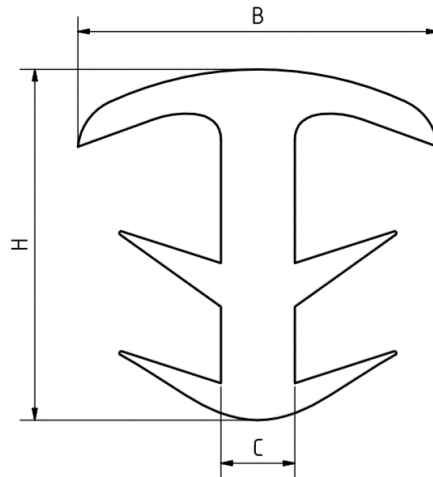

Type	Dimension B	Dimension H	Dimension C	Joint width
FN 20	39	38	8	15 - 25
FN 30	55	40	16	25 - 35

All dimensions in mm

